



# ALLIED MACHINE & ENGINEERING

Holemaking Solutions for Today's Manufacturing



Drilling



Reaming



Burnishing



Threading



## Wohlhaupter®

► **BORING**

Combi-Line Rough and Finish Boring Tools



Specials

## WOHLHAUPTER®



The background of the page is a solid red color. Overlaid on this is a complex geometric pattern. It features several concentric circles that are centered towards the left side of the page. Intersecting these circles is a grid of thin, light-red lines. Some of these lines are straight, while others are curved, following the circular pattern. The overall effect is a technical or architectural drawing style.

SECTION

---

# B10-C

---

Combi-Line Rough and Finish Boring

# Wohlhaupter® Rough and Finish Boring

## Combi-Line

► Diameter Range: 0.965" - 7.913" (24.50 mm - 201.00 mm)



## One tool. Two operations.

The Wohlhaupter Combi-Line combines both rough and finish boring into one operation. The front insert holder is the roughing cutting edge while the shorter holder finishes the hole, saving you time and money.

Your safety and the safety of others is very important. This catalog contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalog, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalog. Safety messages follow these words.

### **WARNING**

**WARNING** (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

**NOTICE** means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

**NOTE** and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit [www.alliedmachine.com](http://www.alliedmachine.com) for the most up-to-date information and procedures.

## Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General  
Machining




Oil & Gas



Renewable  
Energy


## Reference Icons

The following icons will appear throughout the catalog to help you navigate between products.




### Clamping Elements

For use with insert holders and boring heads




### Shanks

A variety of shanks for different machines




### Inserts

For use with insert holder boring heads and boring bars using indexable inserts



### MVS Connection Color Guide

Detailed instructions and information regarding the MVS connection(s)



### Recommended Cutting Data

Speed and feed recommendations for optimum and safe boring



### Coolant-Through Option

Indicates that the product is coolant through

## Combined Rough and Finish Boring Table of Contents

### Combi-Line Introduction

Product Overview . . . . .	2 - 3
Material Removal Percentages   Tool Usage	
Same Level Cutting . . . . .	4
Boring Head and Insert Holder . . . . .	5
90° and 95° Approach Angle Insert Holders -	
Form 101 and 103 . . . . .	6
Accessories . . . . .	7

Series	Diameter Range	
	Imperial (inch)	Metric (mm)
Combi-Line 404 (401)	0.965 - 7.913	24.50 - 201.00



# Combi-Line Product Overview

## Combi-Line ROUGH & FINISH BORING

### Two operations. One Tool.

Decrease cycle time and tool changes with the Wohlhaupter Combi-Line. The Combi-Line combines rough and finish boring into one tool with height displaced insert holders.

Reduce your **cycle time** with the Combi-Line.

- Diameter range: 0.965" - 7.913" (24.50 mm - 201.00 mm)
- Reduce cycle and tool changing time
- Available in semi-standard same level or height displaced insert holders
- Coolant through
- 0.0001" (0.002 mm) vernier adjustment on finishing insert holder
- Max spindle speed: 5,000 SFM



**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.  
ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

## Cycle time is crucial. Why not choose the best process?

**Application:** Ductile Cast Iron

**Finish Diameter:** 1.968" (50 mm) (+/- 0.0005" [0.013 mm])


**Pre-Hole Diameter:** 1.771" (45 mm)

**Boring Depth:** 8.228" (209 mm)

**Hole Finish:** 32 Ra



Measure	1st Process Option	
	Step 1 Rough 49 mm Competitor 1.5" High Feed Milling Tool	Step 2 Finish 50 mm Wohlhaupter 320 Boring Head
Speed	1000 SFM (2500 RPM)	600 SFM (1165 PRM)
Feed Rate	0.020 IPT (153 IPM)	0.004 IPR (0.466 IPM)
Total Passes	77	1
Cycle Time (per hole)	1.93 min	1.77 min
Tool Change Time	15 sec	
Cycle Time (per part)	<b>3 min 54 sec</b>	



1.5" High Feed Milling Tool



Wohlhaupter 320 Boring Head

Measure	2nd Process Option	
	Step 1 Rough 49 mm Wohlhaupter Twin Cutter at 49 mm Ø	Step 2 Finish 50 mm Wohlhaupter 320 Boring Head
Speed	500 SFM (990 RPM)	600 SFM (1165 PRM)
Feed Rate	0.012 IPR (11.88 IPM)	0.004 IPR (0.466 IPM)
Total Passes	1	1
Cycle Time (per hole)	.69 min	1.77 min
Tool Change Time	15 sec	
Cycle Time (per part)	<b>2 min 46 sec</b>	



Wohlhaupter Twin Cutter



Wohlhaupter 320 Boring Head

## OUR **SOLUTION**

### Combi-Line Rough and Finish Boring

Measure	3rd Process Option Finish 50mm Wohlhaupter Combi-Line
Speed	600 SFM (1165 RPM)
Feed Rate	0.004 IPR (0.466 IPM)
Total Passes	1
Cycle Time (per hole)	1.77 min
Tool Change Time	0
Cycle Time (per part)	<b>1 min 46 sec</b>

- Combi-Line assembly:  
 (1) *Insert holders* (x2): 402021  
 (2) *Serrated tool body*: 404006  
 (3) *Shank*: 353014

Boring inserts  
 ► *Item No. 297653WHC19*




*60 seconds of  
total cycle time saved*



**1 tool vs. 2 tools saves you time and money**


## Material Removal Percentages | Tool Usage | Same-Level Cutting

### Material Removal Percentages

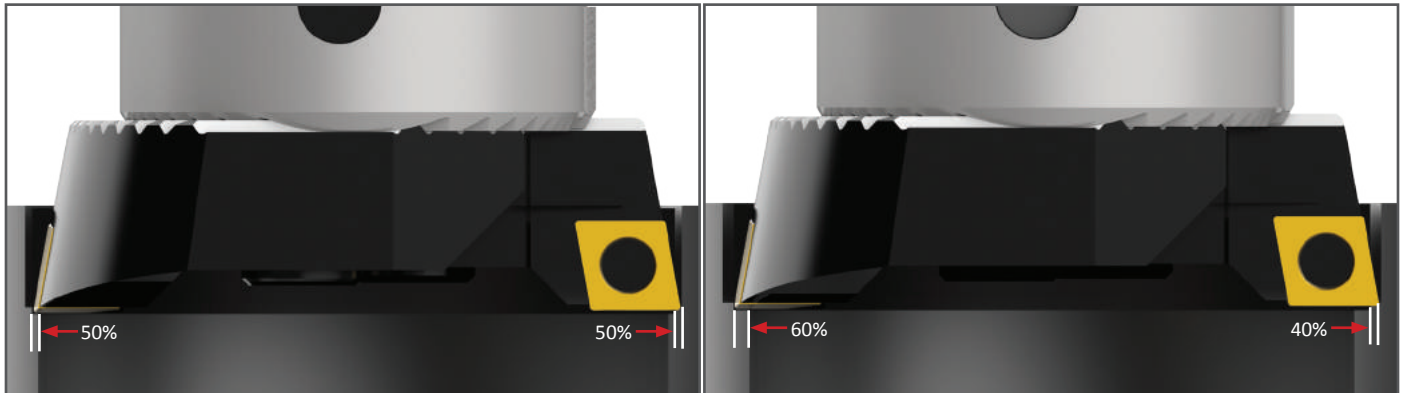

Material removal up to 0.157" (4.00 mm) on diameter: **50% roughing 50% finishing**

Material removal up to 0.157" - 0.276" (4.00 mm - 7.00 mm) on diameter: **60% roughing 40% finishing**

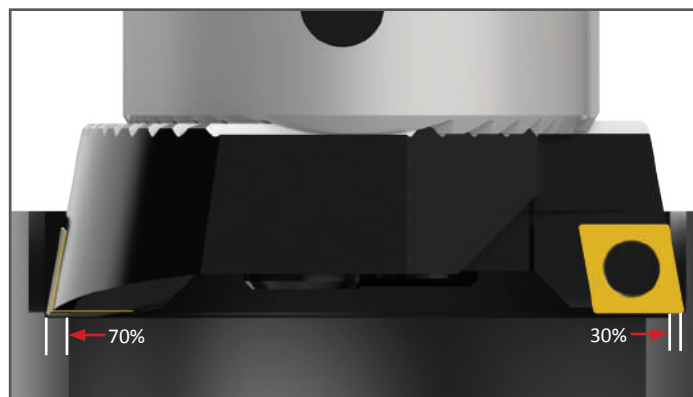

Material removal up to 0.276" - 0.394" (7.00 mm - 10.00 mm) on diameter: **70% roughing 30% finishing**

- For tools with a length-to-diameter ratio greater than 4:1, the existing hole diameter should be no more than 0.157" (4.00 mm) smaller than the finish diameter. The 50% roughing and 50% finishing rule should be applied.
- When boring with severe interruptions, the existing hole diameter should be no more than 0.157" (4.00 mm) smaller than the finish diameter. The 50% roughing and 50% finishing rule should be applied.

**IMPORTANT:** Consult application engineering for technical support when using Combi-Line tools in holes with interruptions.  
ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)

### Tool Usage

- For most applications, the same inserts should be used in both the roughing and finishing insert holders.
- To insure proper chip breaking, the finishing insert holder DOC must be at least 0.020" (0.50 mm)
- Up to a 4:1 length-to-diameter ratio, standard insert holders with a height displacement of up to 0.012" (0.30 mm) can be used.
- Inserts with wiper geometry are recommended only for special Combi-Line applications.


### Same-Level Cutting (0.003" (0.08 mm) Height Displacement)

- With length-to-diameter ratios greater than 4:1, same-level insert holders are recommended to reduce the risk of vibration.
- Same-level cutting inserts will create a 0.003" (0.08 mm) step between the roughing and finishing sides.
- Boring blind holes may require the use of same-level insert holders. (If a true 90° flat bottom is required, a secondary operation to clean up the bottom step may be needed.)
- Combi-Line should be applied as a single-effective cutting tool even when same-level insert holders are used.



## Boring Heads and Insert Holders

Diameter Range: 0.965" - 7.913" (24.50 mm - 201.00 mm)

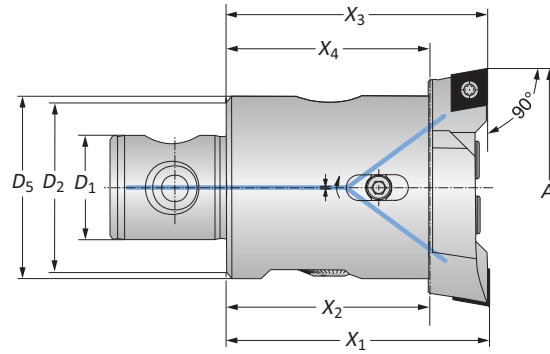


### COMBI LINE

Connection	Boring Range	Boring Head							Part No.	
$D_2   D_1$	A	$X_1$	$X_3$	$X_2$	$X_4$	$D_5$	Weight	Insert Form	(x2)* Insert Holder**	Boring Head
22 - 11	0.965 - 1.161	1.811	1.801	1.339	1.329	—	0.220 (lbs)	101	402029	404003
25 - 14	1.142 - 1.457	2.205	2.195	1.614	1.604	1.024	0.440 (lbs)	101	402009	404004
25 - 14	1.142 - 1.457	2.205	2.195	1.614	1.604	1.024	0.440 (lbs)	103	402011	404004
25 - 14	1.417 - 1.732	2.205	2.195	1.614	1.604	1.181	0.661 (lbs)	101	402017	404005
25 - 14	1.417 - 1.732	2.205	2.195	1.614	1.604	1.181	0.661 (lbs)	103	402019	404005
32 - 18	1.693 - 2.126	2.598	2.587	1.890	1.878	1.339	0.881 (lbs)	103	402021	404006
40 - 22	2.087 - 2.598	2.953	2.941	2.165	2.154	—	1.543 (lbs)	103	402005	404007
50 - 28	2.559 - 3.268	2.953	2.941	2.165	2.154	—	2.425 (lbs)	103	402013	404008
63 - 36	3.228 - 4.055	3.543	3.531	2.756	2.744	—	4.850 (lbs)	103	402001	404009
80 - 36	4.016 - 5.000	3.543	3.531	2.598	2.587	3.346	6.613 (lbs)	103	402025	404010
80 - 36	5.000 - 5.984	3.543	3.531	2.598	2.587	3.346	6.834 (lbs)	103	402026	404010
80 - 36	5.945 - 6.929	3.543	3.531	2.598	2.587	5.276	8.377 (lbs)	103	402025	404011
80 - 36	6.929 - 7.913	3.543	3.531	2.598	2.587	5.276	8.598 (lbs)	103	402026	404011
22 - 11	24.50 - 29.50	46.00	45.75	34.00	33.75	—	0.10 (kg)	101	402029	401003
25 - 14	29.00 - 37.00	56.00	55.75	41.00	40.75	26.00	0.20 (kg)	101	402009	401004
25 - 14	29.00 - 37.00	56.00	55.75	41.00	40.75	26.00	0.20 (kg)	103	402011	401004
25 - 14	36.00 - 44.00	56.00	55.75	41.00	40.75	30.00	0.30 (kg)	101	402017	401005
25 - 14	36.00 - 44.00	56.00	55.75	41.00	40.75	30.00	0.30 (kg)	103	402019	401005
32 - 18	43.00 - 54.00	66.00	65.70	48.00	47.70	34.00	0.40 (kg)	103	402021	401006
40 - 22	53.00 - 66.00	75.00	74.70	55.00	54.70	—	0.70 (kg)	103	402005	401007
50 - 28	65.00 - 83.00	75.00	74.70	55.00	54.70	—	1.10 (kg)	103	402013	401008
63 - 36	82.00 - 103.00	90.00	89.70	70.00	69.70	—	2.20 (kg)	103	402001	401009
80 - 36	102.00 - 127.00	90.00	89.70	66.00	65.70	85.00	3.00 (kg)	103	402025	401010
80 - 36	127.00 - 152.00	90.00	89.70	66.00	65.70	85.00	3.10 (kg)	103	402026	401010
80 - 36	151.00 - 176.00	90.00	89.70	66.00	65.70	134.00	3.80 (kg)	103	402025	401011
80 - 36	176.00 - 201.00	90.00	89.70	66.00	65.70	134.00	3.90 (kg)	103	402026	401011


\*(2) insert holders are required

\*\*Insert holders sold individually


B10-M: 12-15




B10-C: 6




B10-F



B10-H



B10: vi-vii



ⓘ = Imperial (in)  
Ⓜ = Metric (mm)

Inserts sold separately



**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.

ext: 7611 | email: [appeng@alliedmachine.com](mailto:appeng@alliedmachine.com)




## 90° and 95° Approach Angle Same Level Insert Holders - Form 101 and 103

Diameter Range: 0.965" - 7.913" (24.51mm - 200.90mm)

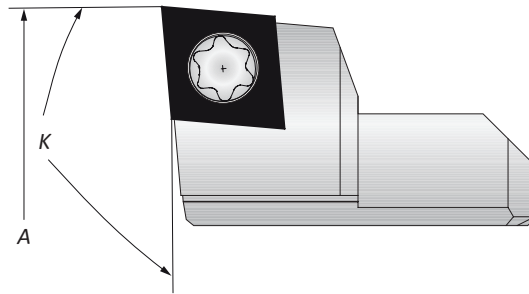

	Boring Tool	Boring Range	90° Insert Holder			95° Insert Holder		
		A	K	Insert Form	Part No.	K	Insert Form	Part No.
i	404003	0.965 - 1.161	90°	101	K32616	95°	101	K32618
	404004	1.142 - 1.457	90°	103	K31372	95°	103	K31403
	404005	1.417 - 1.732	90°	103	K31373	95°	103	K31404
	404006	1.693 - 2.126	90°	103	K31374	95°	103	K31405
	404007	2.087 - 2.598	90°	103	K31375	95°	103	K31406
	404008	2.559 - 3.268	90°	103	K31376	95°	103	K31407
	404009	3.228 - 4.055	90°	103	K31377	95°	103	K31408
	404010	4.016 - 5.000	90°	103	K31628	95°	103	K31632
	404010	5.000 - 5.984	90°	103	K31630	95°	103	K31634
	404011	5.945 - 7.913	90°	103	K31628	95°	103	K31632
m	404011	6.929 - 7.913	90°	103	K31630	95°	103	K31634
	401003	24.51 - 29.48	90°	101	K32616	95°	101	K32618
	401004	29.00 - 37.00	90°	103	K31372	95°	103	K31403
	401005	35.99 - 43.99	90°	103	K31373	95°	103	K31404
	401006	43.00 - 54.00	90°	103	K31374	95°	103	K31405
	401007	53.00 - 65.98	90°	103	K31375	95°	103	K31406
	401008	64.99 - 83.00	90°	103	K31376	95°	103	K31407
	401009	81.99 - 102.90	90°	103	K31377	95°	103	K31408
	401010	102.00 - 127.00	90°	103	K31628	95°	103	K31632
	401010	127.00 - 151.90	90°	103	K31630	95°	103	K31634
	401011	151.00 - 200.90	90°	103	K31628	95°	103	K31632
	401011	175.90 - 200.90	90°	103	K31630	95°	103	K31634

**NOTE:** Same level insert holders will still produce a 0.003" (0.0001 mm) step

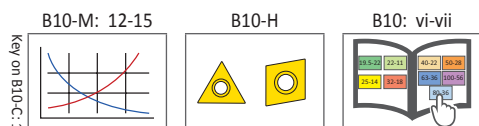


i = Imperial (in)  
m = Metric (mm)


Inserts sold separately

## Accessories

### Screws | Clamping Elements

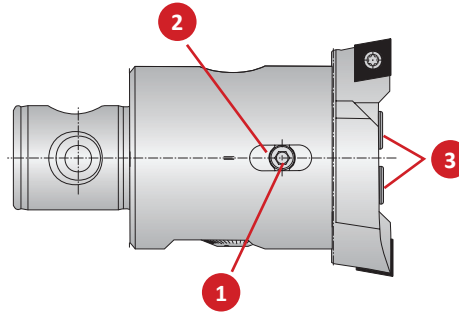

Boring Head Part No.		Part No.				
		1 Clamp Screw	Service Key	2 Clamping Piece	3 Cap Screw	Service Key
i	404003	401223	s2.5 / A	–	401323	s3 / B
	404004	401224	s2.5 / B	401204	401324	s4 / B
	404005	401225	s2.5 / B	401205	401324	s4 / B
	404006	401226	s3 / B	401206	401324	s4 / B
	404007	401227	s3 / B	401207	401327	s5 / B
	404008	115288	s4 / B	401208	401329	s6 / B
	404009	215501	s4 / B	401209	401329	s6 / B
	404010	401230	s4 / B	401210	019183	s8 / C
	404011	401230	s4 / B	401210	019183	s8 / C
m	401003	401223	s2.5 / A	–	401323	s3 / B
	401004	401224	s2.5 / B	401204	401324	s4 / B
	401005	401225	s2.5 / B	401205	401324	s4 / B
	401006	401226	s3 / B	401206	401324	s4 / B
	401007	401227	s3 / B	401207	401327	s5 / B
	401008	115288	s4 / B	401208	401329	s6 / B
	401009	215501	s4 / B	401209	401329	s6 / B
	401010	401230	s4 / B	401210	019183	s8 / C
	401011	401230	s4 / B	401210	019183	s8 / C



i = Imperial (in)  
m = Metric (mm)

# Guaranteed Test / Demo Application Form

Distributor PO #

The following must be filled out completely before your test will be considered

**IMPORTANT:** For processing, send Purchase Order to your Allied Field Sales Engineer (FSE). Please clearly mark the paperwork as "Test Order."

## Distributor Information

Company Name: \_\_\_\_\_  
Contact: \_\_\_\_\_  
Account Number: \_\_\_\_\_  
Phone: \_\_\_\_\_  
Email: \_\_\_\_\_

## End User Information

Company Name: \_\_\_\_\_  
Contact: \_\_\_\_\_  
Industry: \_\_\_\_\_  
Phone: \_\_\_\_\_  
Email: \_\_\_\_\_

**Current Process** List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing

**Test Objective** List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.)

## Application Information

Hole Diameter: \_\_\_\_\_ in/mm Tolerance: \_\_\_\_\_ Material: \_\_\_\_\_  
(4150 / A36 / Cast Iron / etc.)  
Preexisting Diameter: \_\_\_\_\_ in/mm Depth of Cut: \_\_\_\_\_ in/mm Hardness: \_\_\_\_\_  
(BHN / Rc)  
Required Finish: \_\_\_\_\_ RMS State: \_\_\_\_\_  
(Casting / Hot rolled / Forging)

## Machine Information

Machine Type: \_\_\_\_\_ Builder: \_\_\_\_\_ Model #: \_\_\_\_\_  
(Lathe / Screw machine / Machine center / etc.) (Haas, Mori Seiki, etc.)  
Shank Required: \_\_\_\_\_ Power: \_\_\_\_\_ HP/KW  
(CAT50 / Morse taper, etc.)  
Rigidity: Orientation: Tool Rotating: Thrust: \_\_\_\_\_ lbs/N  
☐ Excellent ☐ Vertical ☐ Yes  
☐ Good ☐ Horizontal ☐ No  
☐ Poor

## Coolant Information

Coolant Delivery: \_\_\_\_\_ Coolant Pressure: \_\_\_\_\_ PSI / bar  
(Through tool / Flood)  
Coolant Type: \_\_\_\_\_ Coolant Volume: \_\_\_\_\_ GPM / LPM  
(Air mist, oil, synthetic, water soluble, etc.)

## Requested Tooling

QTY	Item Number

QTY	Item Number



**Allied Machine & Engineering**  
120 Deeds Drive  
Dover, OH 44622

Telephone: (330) 343-4283  
Toll Free USA & Canada: (800) 321-5537  
Fax: (330) 602-3400  
Email: info@alliedmachine.com



## Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine & Engineering  
is registered to  
ISO 9001:2015 by DQS



Wohlhaupter GmbH  
is registered to  
ISO 9001:2015 by QA TECHNIX

## United States

### **Allied Machine & Engineering**

120 Deeds Drive  
Dover OH 44622  
United States

**Phone:**  
+1.330.343.4283

**Fax:**  
+1.330.602.3400

**Toll Free USA and Canada:**  
800.321.5537

**Toll Free USA and Canada:**  
800.223.5140

### **Allied Machine & Engineering**

485 W Third Street  
Dover OH 44622  
United States

**Phone:**  
+1.330.343.4283

**Fax:**  
+1.330.364.7666  
(Engineering Dept.)

**Toll Free USA and Canada:**  
800.321.5537

## Europe

### **Allied Machine & Engineering Co. (Europe) Ltd.**

93 Vantage Point  
Pensnett Estate  
Kingswinford  
West Midlands  
DY6 7FR England

**Phone:**  
+44 (0) 1384.400900

### **Wohlhaupter GmbH**

Maybachstrasse 4  
Postfach 1264  
72636 Frickenhausen  
Germany

**Phone:**  
+49 (0) 7022.408.0

**Fax:**  
+49 (0) 7022.408.212

## Asia

### **Wohlhaupter India Pvt. Ltd.**

B-23, 3rd Floor  
B Block Community Centre  
Janakpuri, New Delhi - 110058  
India

**Phone:**  
+91 (0) 11.41827044

Your local Allied Machine representative:

[www.alliedmachine.com](http://www.alliedmachine.com)

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS  
Wohlhaupter GmbH is registered to **ISO 9001:2015** by QTA TECHNIC



**ALLIED MACHINE  
& ENGINEERING**

Copyright © 2022 Allied Machine & Engineering Corp. All rights reserved.  
All trademarks designated with the ® symbol are registered in the United States and other countries.  
Available Online Only  
Publish Date: August 2022