


Grund- und Kerbzahnschienen Ø 465 – 3255 mm

Basic slides and serrated slides


Guides de base et Guides crantés

ALU LINE


Type A

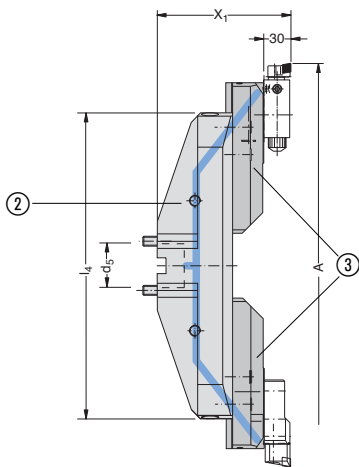

Type B

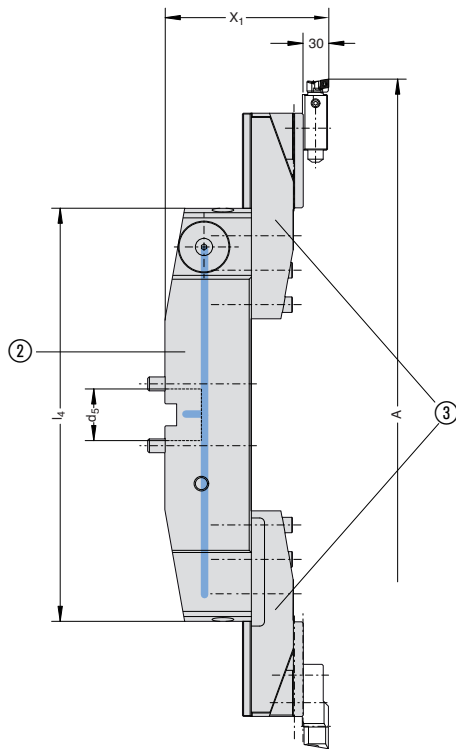

**NEU - NEW
NOUVEAU**



Verbindungsstelle <i>Connection</i> Connexion	Ausdrehbereich <i>Boring range</i> Capacité d'alésage					Grundschiene ② <i>Base slide</i> Guide de base	Kerbzahnschiene ③ <i>Serrated slide</i> Guide cranté
	A	X ₁	l ₄	l ₅	kg (② + ③)	Best.-Nr. <i>Order No.</i> No de cde.	Best.-Nr. <i>Order No.</i> No de cde.
Type A						ALU LINE	
D 60	465 - 745	185	447	129	14,0	349 005	349 015 349 014*
D 60	740 - 1020	185	722	129	20,2	349 006	349 015 349 014*
Type B							
D 60	500 - 780	190	480	130	24,3	349 031	349 035
D 60	950 - 1055	215	480	130	41,3	349 031	349 036
D 60	775 - 1055	215	755	155	42,5	349 032	349 035
D 60	1050 - 1330	240	755	155	59,6	349 032	349 036
D 60	1442 - 1605	255	755	155	86,3	349 032	349 037
D 60	1325 - 1605	240	1305	185	88,2	349 033	349 035
D 60	1325 - 1880	265	1305	185	105,3	349 033	349 036
D 60	1600 - 2155	280	1305	185	132,0	349 033	349 037
D 60	1990 - 2430	285	1305	185	169,8	349 033	349 038
D 60	2150 - 2430	265	2130	225	191,4	349 034	349 035
D 60	2150 - 2705	290	2130	225	208,5	349 034	349 036
D 60	2150 - 2980	305	2130	225	235,2	349 034	349 037
D 60	2150 - 3255	310	2130	225	273,0	349 034	349 038

* Für Schruppeinsatz:
Kerbzahnschiene aus Stahl

* For roughing:
Serrated slide in steel

* Pour d'ébauche:
guide cranté en acier



G